

7165 Strobe Light with Stainless Case / 12Volt



- 自在ブラケットにご注目
 ① 垂直に立てる
 ② 上から吊下げる
 ③ 角度を保って前に押出す
 ④ 直角を保って前に押出す

- 7165 シリーズ ストロボライト・ステンレスケース一体型。
 □ 30 Watt
 □ 縦: 9cm / 横: 16cm / 厚: 6cm / 重量: 500g
 □ 赤・青 = 常時在庫

PAR36ES Strobe Light / TOMAR SIDEOPTIC




- 30 Watt
 □ 赤・青 = 常時在庫
 ★ ライトケース別売




フラッシング・パターンは下記の通り
 各スイッチでコントロール出来ます。

SWITCH		ACTION
BLUE	GREEN	
OFF	OFF	Quad Flash
OFF	ON	Double Flash
ON	OFF	Mega Flash
ON	ON	Cycle Pattern

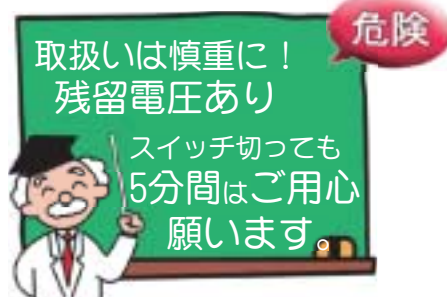

- ① Alternate Flashing (2灯を交互に点灯) させるには?
 1. 発光のタイミングはブラックボックスからトリガー・ライン経由で指示が出ます。
 2. 3番ピンのYellowとWhiteの発光時期をずらしてあるトリガー・ラインを組み合わせて使います。
 3. 同時に発光させるには 同色のトリガー・ラインを組み合わせて使用します

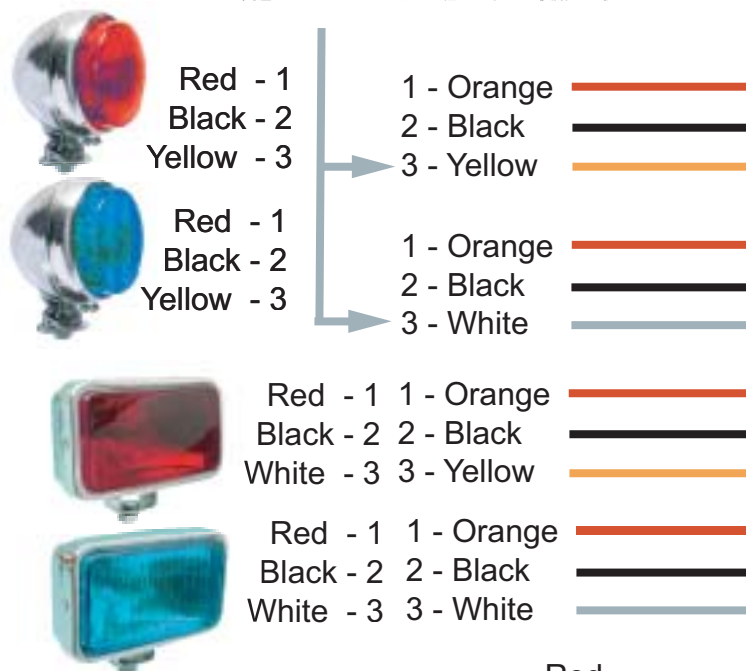


EPS - 40X Series

402
404



INPUT VOLTAGE 10 to 30 Vdc
 INPUT CURRENT 3.75A at 12.8V
 2A at 25.6V
 INPUT POWER 51.2Watts
 OUTPUT POWER 40 Watts
 OUTPUT ENERGY..... 34 Joules
 FLASH RATES
 Double Flash: 170 flashes per minute.
 Quad Flash: 140 flashes per minute.
 Mega Flash: 140 flashes per minute.

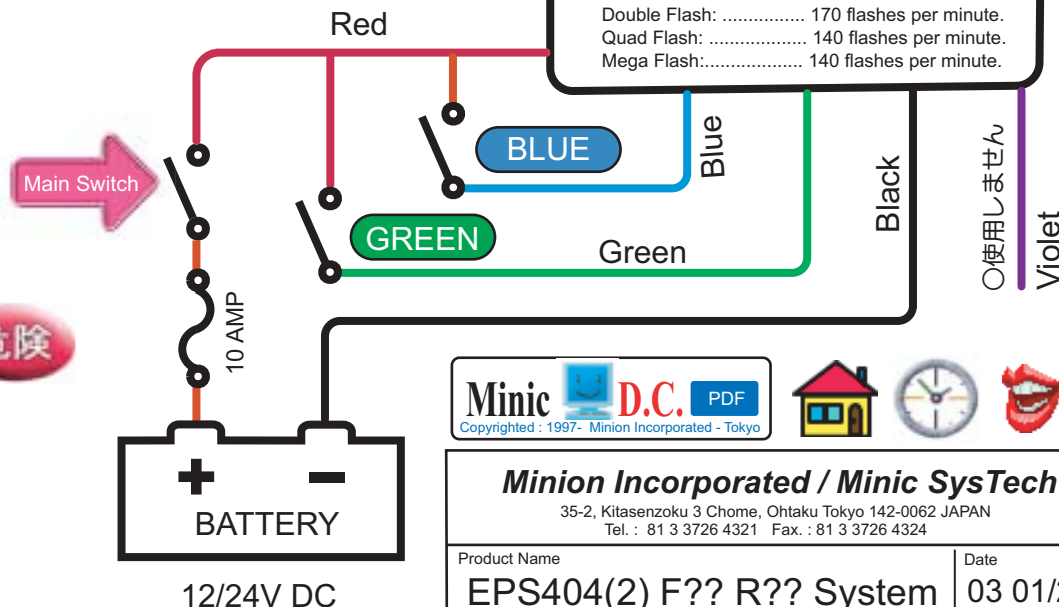

Minic D.C. PDF
 Copyrighted : 1997- Minion Incorporated - Tokyo



Minion Incorporated / Minic SysTech

35-2, Kitasenzoku 3 Chome, Ohtaku Tokyo 142-0062 JAPAN
 Tel. : 81 3 3726 4321 Fax. : 81 3 3726 4324

Product Name	Date
EPS404(2) F?? R?? System	03 01/28
Drawing No.	Scale
Installation Sheet	